


Zone of Confidence (ZOC) Diagram

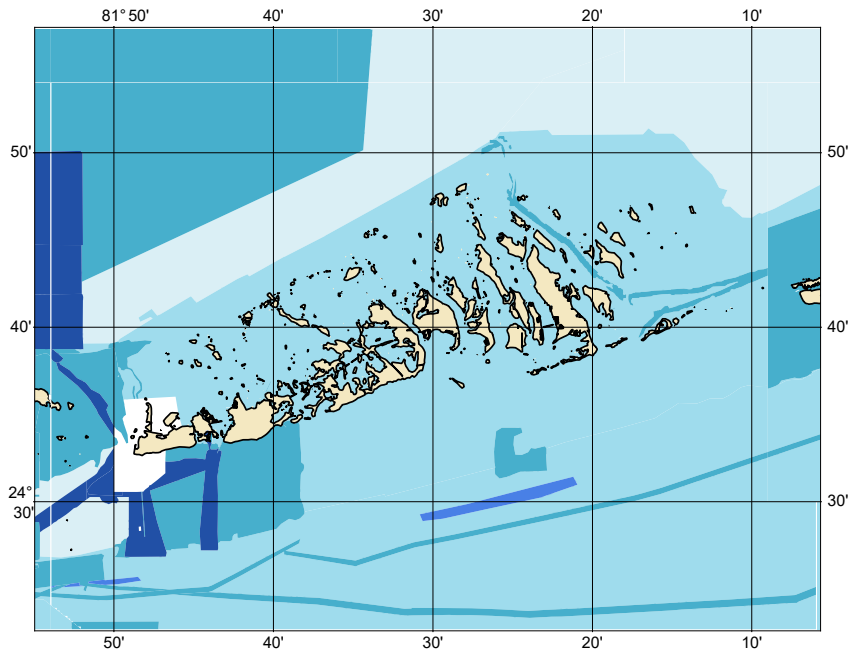

ZOC CATEGORIES

| ZOC | COLOR | POSITION<br>ACCURACY   | DEPTH<br>ACCURACY   | SEAFLOOR<br>COVERAGE   |
|-----|-------|--|---|--|
| A1  |       | $\pm 5\text{ m} + 5\% \text{ depth}$<br>$\pm 16.4\text{ ft} + 5\% \text{ depth}$ | $= 0.50\text{ m} + 1\% \text{ d}$<br>$= 1.6\text{ ft} + 1\% \text{ d}$<br>$= 0.3\text{ fm} + 1\% \text{ d}$ | All significant seafloor features detected.  |
| A2  |       | $\pm 20\text{ m}$<br>$\pm 65.6\text{ ft}$  | $= 1.00\text{ m} + 2\% \text{ d}$<br>$= 3.3\text{ ft} + 2\% \text{ d}$<br>$= 0.6\text{ fm} + 2\% \text{ d}$ | All significant seafloor features detected.  |
| B   |       | $\pm 50\text{ m}$<br>$\pm 164.0\text{ ft}$                                       | $= 1.00\text{ m} + 2\% \text{ d}$<br>$= 3.3\text{ ft} + 2\% \text{ d}$<br>$= 0.6\text{ fm} + 2\% \text{ d}$ | Uncharted features hazardous to surface navigation are not expected but may exist. |
| C   |       | $\pm 500\text{ m}$<br>$\pm 1640.4\text{ ft}$                                     | $= 2.00\text{ m} + 2\% \text{ d}$<br>$= 6.6\text{ ft} + 2\% \text{ d}$<br>$= 1.1\text{ fm} + 2\% \text{ d}$ | Depth anomalies may be expected.   |
| D   |       | Worse than ZOC C   | Worse than ZOC C  | Large depth anomalies may be expected.   |
| U   |       | Unassessed - The quality of the bathymetric data has yet to be assessed.         |   |  |

# 114420G

NOAA CUSTOM CHART  
NOTES GEOSPATIAL DATABASE  
VERSION 2.0B - 29 MARCH 2024

CAUTION  
AUTOMATED CHART GENERATION

The records of the NOAA Custom Chart Notes Geospatial Database are current as of May 1st, 2023. Subsequent additions and refinements are to be expected. Please refer to all available navigational publications for complete information about the charted area.

## CAUTION CHART UPDATES

This NOAA Custom Chart contains up-to-date information only as of the time of creation, and will become outdated. Mariners are advised to visit [https://distribution.charts.noaa.gov/weekly\\_updates/](https://distribution.charts.noaa.gov/weekly_updates/) to check for weekly updates, and to render a new NOAA Custom Chart when information is updated. Notices to Mariners are not issued for corrections to this NOAA Custom Chart.

## AUTHORITIES

Hydrography and topography by the National Ocean Service, Coast Survey, with additional data from the Corps of Engineers, Geological Survey, U.S. Coast Guard and National Geospatial-Intelligence Agency.

## COMMENTS REQUESTED

NOAA encourages users to submit inquiries, discrepancies, or comments about this chart via NOAA's ASSIST tool at <https://nauticalcharts.noaa.gov/customer-service/assist/>.

This NOAA Custom Chart has been automatically rendered from NOAA Electronic Navigational Chart (NOAA ENC®) data. Mariners using this NOAA Custom Chart are advised that this is a static reproduction of the NOAA ENC®. This NOAA Custom Chart has not been individually quality checked or adjusted for optimal use for navigation. The portrayal may be at a different scale from that of the original NOAA ENC®. Mariners are advised to use caution when using this NOAA Custom Chart for navigation and are encouraged to use the latest NOAA ENC® to access the most up-to-date information. Mariners must also comply with all applicable regulatory requirements.

## HEIGHTS

Heights of fixed aids to navigation and vertical clearances of overhead obstructions will be shown in feet if the units are set to feet or fathoms. If units are set to meters, heights will be shown in meters. Land elevation values are shown in meters only.

## WATER LEVELS, CURRENTS, AND TIDES

Real-time water levels, tide predictions, and tidal current predictions are available on the internet from NOAA's Center for Operational Oceanographic Products and Services (CO-OPS) at [https://tidesandcurrents.noaa.gov/water\\_level\\_info.html](https://tidesandcurrents.noaa.gov/water_level_info.html) and [https://tidesandcurrents.noaa.gov/currents\\_info.html](https://tidesandcurrents.noaa.gov/currents_info.html).

## ABBREVIATIONS

For complete list of Symbols and Abbreviations, see Chart No. 1.

# 114420G

## POLLUTION REPORTS

Report all spills of oil and hazardous substances to the National Response Center via 1-800-424-8802 (toll free), or to the nearest U.S. Coast Guard facility if telephone communication is impossible (33 CFR 153).

## WARNING

The prudent mariner will not rely solely on any single aid to navigation, particularly on floating aids. See U.S. Coast Guard Light List and U.S. Coast Pilot for details.

## SUPPLEMENTAL INFORMATION

Consult U.S. Coast Pilot 4 for important supplemental information.

Refer to charted regulation section numbers.

## SOUNDING DATUM

Soundings referred to Mean Lower Low Water (MLLW).

## NOTE A

Navigation regulations are published in Chapter 2, U.S. Coast Pilot 4. Additions or revisions to Chapter 2 are published in the Notices to Mariners. Information concerning the regulations may be obtained at the Office of the Commander, 7th Coast Guard District in Miami, FL or at the Office of the District Engineer, Corps of Engineers in Jacksonville, FL.

Refer to charted regulation section numbers.

## AIDS TO NAVIGATION

Consult U.S. Coast Guard Light List for supplemental information concerning aids to navigation.

## RADAR REFLECTORS

Radar reflectors have been placed on many floating aids to navigation. Individual radar reflector identification on these aids has been omitted from this chart.

## ADDITIONAL INFORMATION

Additional information can be obtained at [www.nauticalcharts.noaa.gov](http://www.nauticalcharts.noaa.gov)

## SUPPLEMENTAL INFORMATION

Consult U.S. Coast Pilot 5 for important supplemental information.

Refer to charted regulation section numbers.

## VERTICAL DATUM

Overhead clearances are referred to Mean High Water (MHW).

## NOTE A

Navigation regulations are published in Chapter 2, U.S. Coast Pilot 5. Additions or revisions to Chapter 2 are published in the Notices to Mariners. Information concerning the regulations may be obtained at the Office of the Commander, 7th Coast Guard District in Miami, FL or at the Office of the District Engineer, Corps of Engineers in Jacksonville, FL.

## COLREGS, 80.740 (SEE NOTE A)

International Regulations for Preventing Collisions at Sea, 1972. The entire area of this chart falls seaward of the COLREGS Demarcation Line.

## CORAL PROPAGATION

Uncharted submerged manmade structures, designed for the purpose of coral propagation, may exist within the limits of this chart, principally in shallow water areas.

## INTRACOASTAL WATERWAY AIDS

The U.S. Aids to Navigation System is designed for use with nautical charts, and the exact meaning of an aid to navigation may not be clear unless the appropriate chart is consulted. Aids to navigation marking the Intracoastal Waterway exhibit unique yellow symbols to distinguish them from aids marking other waterways. When following the Intracoastal Waterway southward from Norfolk, VA to Cross Bank, FL, aids with yellow triangles should be kept on the starboard side of the vessel and aids with yellow squares should be kept on the port side of the vessel. A horizontal yellow band provides no lateral information, but simply identifies aids to navigation as marking the Intracoastal Waterway.

## CAUTION

LIMITATIONS ON THE  
USE OF RADIO SIGNALS

Limitations on the use of radio signals as aids to marine navigation can be found in the U.S. Coast Guard Light Lists and National Geospatial-Intelligence Agency Publication 117.

Radio direction-finder bearings to commercial broadcasting stations are subject to error and should be used with caution.

## HURRICANES AND TROPICAL STORMS

Hurricanes, tropical storms and other major storms may cause considerable damage to marine structures, aids to navigation and moored vessels, resulting in submerged debris in unknown locations. Charted soundings, channel depths and shoreline may not reflect actual conditions following these storms. Fixed aids to navigation may have been damaged or destroyed. Buoys may have been moved from their charted positions, damaged, sunk, extinguished or otherwise made inoperative. Mariners should not rely upon the position or operation of an aid to navigation. Wrecks and submerged obstructions may have been displaced from charted locations. Pipelines may have become uncovered or moved. Mariners are urged to exercise extreme caution and are requested to report aids to navigation discrepancies and hazards to navigation to the nearest United States Coast Guard unit.

## CAUTION

Temporary changes or defects in aids to navigation are not indicated on this chart. See Local Notice to Mariners.

During some winter months or when endangered by ice, certain aids to navigation are replaced by other types or removed. For details, see U.S. Coast Guard Light List.

CAUTION  
BASCULE BRIDGES

For bascule bridges, whose spans do not open to a full upright or vertical position, unlimited vertical clearance is not available for the entire charted horizontal clearance.

## CAUTION

Improved channels are subject to shoaling, particularly at the edges.

CAUTION  
SHOALS AND PASSES

Mariners are advised to use caution in Florida Bay. The shoals and passes were obtained from reports and have not been verified by field surveys. Stakes and piles, marking passes, are not shown due to their frequent change in position.

CAUTION  
DANGER AREA

Area is open to unrestricted surface navigation but all vessels are cautioned neither to anchor, dredge, trawl, lay cables, bottom, nor conduct any other similar type of operation because of residual danger from mines on the bottom.

PROHIBITED AREAS  
(AREAS TO BE AVOIDED)

Under the Florida Keys National Marine Sanctuary and Protection Act, Pub. L.101-605 and IMO advisory SN/Circ.145, these areas are to be avoided by tank vessels and vessels greater than 50 meters/164 feet in length.

## PARTICULARLY SENSITIVE SEA AREA

A Particularly Sensitive Sea Area (PSSA) is an environmentally sensitive area around which mariners should exercise extreme caution. See U.S. Coast Pilot volumes for information regarding this area.

GREAT WHITE HERON  
NATIONAL WILDLIFE REFUGE  
(PROTECTED AREA)CAUTION  
SUBMERGED CABLES AND PIPELINES

Additional uncharted submarine pipelines and submarine cables may exist within the area of this chart. Not all submarine pipelines and submarine cables are required to be buried, and those that were originally buried may have become exposed. Mariners should use extreme caution when operating vessels in depths of water comparable to their draft in areas where pipelines and cables may exist, and when anchoring, dragging or trawling.

Covered wells may be marked by lighted or unlighted buoys.

NOTE Z  
NO-DISCHARGE ZONE, 40 CFR 140

All Florida State waters within the Florida Keys National Marine Sanctuary are designated as a No-Discharge Zone (NDZ). Under the Clean Water Act, Section 312, all vessels operating within a NDZ are completely prohibited from discharging any sewage, treated or untreated, into the waters. All vessels with an installed marine sanitation device (MSD) that are navigating, moored, anchored, or docked within a NDZ must have the MSD disabled to prevent the overboard discharge of sewage (treated or untreated) or install a holding tank. Regulations for the NDZ are contained in the U.S. Coast Pilot. Additional information concerning the regulations and requirements may be obtained from the Environmental Protection Agency (EPA) website: <https://www.epa.gov/vessels-marinas-and-ports>

FLORIDA KEYS  
NATIONAL MARINE SANCTUARY  
(PROTECTED AREA: 15 CFR 922; SEE NOTE A)LOOE KEY  
MANAGEMENT AREA  
(PROTECTED AREA: SEE NOTE A)

# 114420G

LOOE KEY  
(SANCTUARY PRESERVATION AREA; SEE  
NOTE A)

## RESTRICTED AREA NEWFOUND HARBOR CHANNEL

No anchoring by sailboats or other  
masted vessels due to the presence of  
high tension power lines.

### OVERHEAD POWER CABLES

Overhead power cables run parallel  
to U.S. Highway No. 1. All clearances  
are greater than those of the charted  
fixed bridges.

### NOAA WEATHER RADIO BROADCASTS

The NOAA Weather Radio station  
listed below provides continuous  
weather broadcasts. The reception  
range is typically 20 to 40 nautical  
miles from the antenna site, but can  
be as much as 100 nautical miles for  
stations at high elevations.

Up. Sugarloaf Key, FL WXJ-95 162.4MHz

### OBSTRUCTIONS

Submerged obstructions reported  
between Salt Pond Keys and Stock  
Island in 1979.

### CAUTION SHOALING

Extensive shoaling has been  
reported in the marked channel  
through the keys from Big Spanish  
Channel to Key West. Mariners should  
use local knowledge when navigating  
this waterway.

### NOAA WEATHER RADIO BROADCASTS

The NOAA Weather Radio stations  
listed below provide continuous  
weather broadcasts. The reception  
range is typically 20 to 40 nautical  
miles from the antenna site, but can  
be as much as 100 nautical miles for  
stations at high elevations.

Tea Table Key, FL WWG-80 162.45MHz  
Up. Sugarloaf Key, FL WXJ-95 162.40MHz